

INCEPTOR[®] MILLI



Converter Plates are available for retrofitting the standard version into ceilings that have cut-outs bigger than Ø75mm, up to a max cut-out of Ø120mm.

5 FINISH OPTIONS

Choose between White, Chrome, Satin Chrome, Black & Antique Brass

BROAD CUT-OUT RANGE

Whilst maintaining a 100% fire rating Milli can be installed in a wide scope of pre-existing ceiling cut-outs (64-75mm Standard & Baffle, 68-75mm Adjustable). Milli also boasts a low profile, 60mm Standard & Baffle, 75mm Adjustable.

POWER & CCT SWITCHABLE

Change Wattage between 4W & 6.4W.



Change colour temperature between:
Warm White 2700K
Cool White 4000K
Daylight 6500K



INSULATION COVERABLE

The Milli family features an insulation cover which allows you to install the downlights safely under insulation, this gives the fitting an extra 5mm of distance away from the insulation, preventing overheating. Fire Rated to 30, 60 and 90 minutes and also feature an Intumescent Strip, which, when exposed to fire, expands to seal the gap between the luminaire and plasterboard.

IP65



<19 UGR

BAFFLE VERSION



35,000 HRS



25° BAFFLE
60° NON-BAFFLE
BEAM ANGLE




JOIST
FIRE RATED



30, 60 & 90
MIN FIRE-RATING

4 - 6.4W DIMMABLE FIXED FIRE-RATED LED DOWNLIGHT

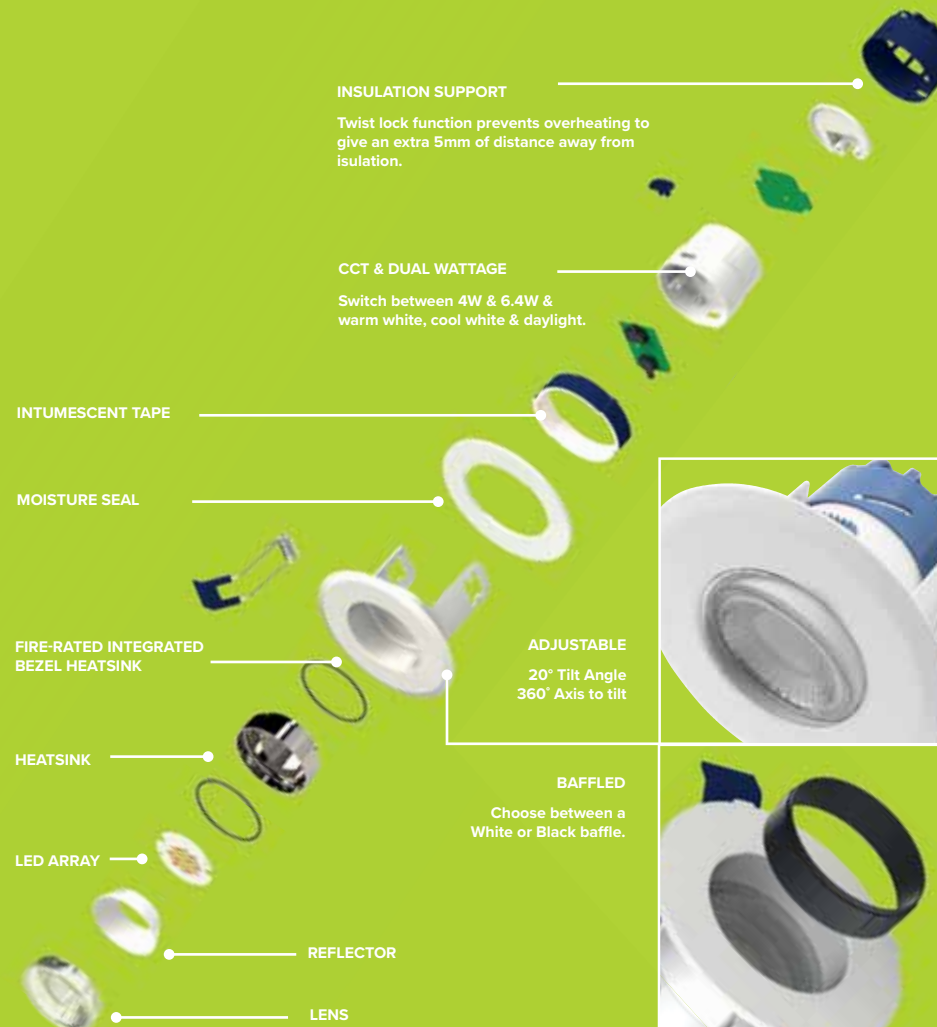

PRE-WIRED FLOW[™] CONNECTOR

Pre-wired with a Fast-Fit 3 Pole & loop Flow[™] connector. We also provide a loose push-fit Flow[™] connector in the box which ensures a quick and easy installation process.



Scan to view
specifications.

INCEPTOR® MILLI

4 - 6.4W DIMMABLE IP65 LED FIXED DOWNLIGHTS WITH CCT SWITCH



- OXM-AB Fixed Downlight - Antique Brass
- OXM-B Fixed Downlight - Black
- OXM-CH Fixed Downlight - Chrome

- OXM-SC Fixed Downlight - Satin Chrome
- OXM-W Fixed Downlight - White
- OXM-W-10 Fixed Downlight - White (Pack of 10)

FINISH

AB

BK

CH

SC

W

COLOUR TEMPERATURE

2700K

4000K


6500K

CCT



Dimming Format	CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Input Frequency (Hz)	Voltage (AC)	Operating Temp (°C)
Triac	>80	35000	60	4 / 6.4	50	220-240	-20 to +25

CCT (K)	2700	4000	6500
Lumens (lm) 4W	430	480	
Lumens (lm) 6.4W	720	800	
Efficacy (lm/W) 4W	108	120	
Efficacy (lm/W) 6.4W	112	125	



Dimensions (mm):
90 (Dia.) x 60(D)

Cutout Diameter Max (mm):
75

Cutout Diameter Min (mm):
64

ACCESSORIES

140MM DIAMETER INCEPTOR® MILLI CONVERTER PLATE



- OXM-CPS-AB

Converter Plate - Antique Brass
- OXM-CPS-SC

Converter Plate - Satin Chrome
- OXM-CPS-B

Converter Plate - Black
- OXM-CPS-W

Converter Plate - White
- OXM-CPS-CH

Converter Plate - Chrome

FINISH

AB

BK

CH

SC

W



Dimensions (mm):
140 (Dia.) x 8 (D)

Cutout Diameter Max (mm):
120

ORNA

7W IP54 SQUARE UP & DOWN LED WALL FITTINGS

- OV2012W7GY7W Square Up & Down LED Wall Fitting - IP54 - 3000K - Grey
- OV2012C7GY7W Square Up & Down LED Wall Fitting - IP54 - 4000K - Grey



FINISH

GY


COLOUR TEMPERATURE

3000K

4000K



CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Efficacy (lm/W)	Input Frequency (Hz)	Voltage (AC)	Lumens (lm)	Operating Temp (°C)
>80	50000	30 (Top & Bottom)	2 x 3.5 (7)	85	50/60	220-240	2 x 300 (600)	-20 to +50



Dimensions (mm):
70 (W) x 106 (D) x 239 (H)

QUADRA

10W IP54 RECTANGULAR LED BACKLIT WALL FITTINGS

- OV2156W10GY10W Rectangular LED Wall Fitting - IP54 - 3000K - Grey
- OV2156C10GY10W Rectangular LED Wall Fitting - IP54 - 4000K - Grey



FINISH

GY


COLOUR TEMPERATURE

3000K

4000K



CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Efficacy (lm/W)	Input Frequency (Hz)	Voltage (AC)	Lumens (lm)	Operating Temp (°C)
>80	50000	120	10	62	50/60	220-240	620	-20 to +50



Dimensions (mm):
110 (W) x 105 (D) x 250 (H)

EVO DECO XL

20W IP54 LED BULKHEAD - CCT

- OV9800WH

Bulkhead - Standard - White
- OV9800WHMW

Bulkhead - Microwave Sensor - White
- OV9800WHEM

Bulkhead - Emergency - White
- OV9800WHEMST

Bulkhead - Self-Test Emergency - White
- OV9800WHEMMW

Bulkhead - Microwave Sensor & Emergency - White
- OV9800WHEMMWST

Bulkhead - Microwave Sensor & Self-Test Emergency - White

- OV9800WHDA

Bulkhead - Standard With DALI - White
- OV9800WHEMDA

Bulkhead - Emergency & DALI - White
- OV9800WHSD

Bulkhead - Standard With Switch Dim - White
- OV9800WHEMSD

Bulkhead - Emergency & Switch Dim - White

FINISH

W

COLOUR TEMPERATURE

3000K

4000K

6000K

CCT



FEATURES AS STANDARD						
CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Input Frequency (Hz)	Voltage (AC)	Operating Temp (°C)
>80	30000	110	Standard: 20 Emergency: 22	50/60	220-240	Standard: -15 to +50 Emergency: 0 to +50

CCT (K)	3000	4000	6000
Lumens (lm)	1700	1900	1950
Emergency Lumens (lm)	98		
Corridor Lumens 10% (lm)	170	190	195
Corridor Lumens 25% (lm)	425	475	487
Efficacy (lm/W)	85	95	97

MICROWAVE VERSION		
Light Level (Lux)	Detection Angle (°)	Installation Height (m)
15 / Disable	≤150	2.5 - 6



U-LUX



24-48W IP65 POWER SWITCHABLE LINEAR LED LUMINAIRES - 4000K - 1800MM (6FT)

- OU648

1800mm Linear Batten LED Luminaire
- OU648-M

1800mm Linear Batten LED Luminaire - Microwave Sensor
- OU648-E

1800mm Linear Batten LED Luminaire - Self-Test Enable / Disable Emergency
- OU648-ME

1800mm Linear Batten LED Luminaire - Microwave Sensor & Self-Test Enable / Disable Emergency
- OVMU2

Modular Emergency Converter with Self-test selectable
- OVMWU400

Modular Microwave Sensor
- MS

EM

ST

EM

MS

ST

FINISH

GY

COLOUR TEMPERATURE

4000K

OVMU2

OVMWU400

Dimensions (mm):

1800 (L) x 96 (W) x 83 (D)

Compatible Products:

OVMU2

Emergency Converter

OVMWU400

Microwave Sensor

Replacement Batteries:

OVEMB6416LIS

6.4V 1600mAh LiFePo4 Battery – Serial

Light Level (Lux)

2 / 10 / 30 / 50 / Disable

Detection Distance (M)

5

Installation Height (m)

2.5 - 6

Wattage (W)

24

31

40

48

Emergency Wattage (W)

26

33

42

50

Lumens (lm)

3840

4960

6400

7680

Emergency Lumens (lm)

300

Efficacy (lm/W)

160

FEATURES AS STANDARD

CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Input Frequency (Hz)	Voltage (AC)	Operating Temp (°C)
80	50000	120	Standard: 24/31/40/48 Emergency: 26/33/42/50	50/60	220-240	Standard: -20 to +40 Emergency: 0 to +40

MICROWAVE VERSION

Light Level (Lux)	Detection Distance (M)	Installation Height (m)
2 / 10 / 30 / 50 / Disable	5	2.5 - 6

Diffuser & LED Array Anchored To Base

232

PRODUCT FEATURES KEY: D - Dimmable E - Emergency MS - Microwave Sensor ST - Self-Test CF - Corridor Function

oviaUK.com

oviaUK.com

PRODUCT FEATURES KEY: D - Dimmable E - Emergency MS - Microwave Sensor ST - Self-Test CF - Corridor Function

233

INCEPTOR® SLATE BACKLIT UGR

22W 600MM X 600MM LOW-GLARE BACKLIT LED PANELS

OXS2222W LED Panel - 4000K - White



FINISH

W

COLOUR TEMPERATURE

4000K




Compatible Products:

- OVCGMF0001**
240V 29-48W 3 in 1 Multi-function Dimmable Constant Current LED Driver
- OVSUSP731**
Suspension Wire Kit
- OVREC731**
600mm x 600mm Recess Frame Kit
- OVSURF6X6**
600mm x 600mm Surface Frame Kit
- OV7BCK**
Ceiling Bracket for Backlit Panel
- OBKEP4**
4W Emergency Conversion Self-Test Enable / Disable Solution for LED Panel Lights
- OEP4-DA**
4W DALI Self-Test Emergency Downlight

Complete with Remote Driver & prewired push-fit Flow™ Connector

CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Efficacy (lm/W)	Input Frequency (Hz)	Voltage (AC)	Lumens (lm)	Operating Temp (°C)
>80	50000	90	22	140	50	220-240	3150	-5 to +40



Dimensions (mm):
595 (L) x 595 (W) x 33 (D)



INCEPTOR® SLATE BACKLIT UGR

22-30W 600MM X 600MM LOW-GLARE BACKLIT LED PANELS

OXS6X622-30W LED Panel - 4000/5000/6500K - White



FINISH

W

COLOUR TEMPERATURE

4000K 5000K 6500K




Compatible Products:

- OVCGMF0001**
240V 29-48W 3 in 1 Multi-function Dimmable Constant Current LED Driver
- OVSUSP731**
Suspension Wire Kit
- OVREC731**
600mm x 600mm Recess Frame Kit
- OVSURF6X6**
600mm x 600mm Surface Frame Kit
- OV7BCK**
Ceiling Bracket for Backlit Panel
- OBKEP4**
4W Emergency Conversion Self-Test Enable / Disable Solution for LED Panel Lights
- OEP4-DA**
4W DALI Self-Test Emergency Downlight

Complete with Remote Driver & prewired push-fit Flow™ Connector

CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Input Frequency (Hz)	Voltage (AC)	Operating Temp (°C)
>80	50000	90	22/30	50	220-240	-5 to +40



Wattage (W)	22	30
Lumens (lm)	3150	4200
Efficacy (lm/W)	143	140

Dimensions (mm):
595 (L) x 595 (W) x 33 (D)



INCEPTOR® ACE

50W IP65 LED ASYMMETRIC FLOODLIGHT

OV10250BKCW 50W Floodlight - 4000K - Black



FINISH


BK

COLOUR TEMPERATURE

4000K



CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Efficacy (lm/W)	Input Frequency (Hz)	Voltage (AC)	Lumens (lm)	Operating Temp (°C)
>80	50000	60 x 120	50	110	50/60	220-240	5500	-20 to +40



Dimensions (mm):
237 (W) x 200 (H) x 39 (D)

INCEPTOR® ACE

100W IP65 LED ASYMMETRIC FLOODLIGHT

OV102100BKCW 100W Floodlight - 4000K - Black
OV102100BKCWPC 100W Floodlight With Photocell - 4000K - Black



FINISH


BK

COLOUR TEMPERATURE

4000K



CRI	LED Lifetime (Hrs)	Beam Angle (°)	Wattage (W)	Efficacy (lm/W)	Input Frequency (Hz)	Voltage (AC)	Lumens (lm)	Operating Temp (°C)
>80	50000	60 x 120	100	120	50/60	220-240	12000	-20 to +40



Dimensions (mm):
282 (W) x 321 (H) x 41 (D)