

Switches

The Mode® range of switches has been developed largely as a modular range based on the large selection of Polar White coloured switch modules available in the Minigrid® range.

These same modules are interchangeable in other Click® accessory ranges. Simple, single screw fixing of modules offers the simplest possible means of installing and replacing modules.

Media transfer plates and modules can be found in the New Media™ section of this catalogue.

MINIGRID®

The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For information on the full range of modules available please refer to the Minigrid® section of this catalogue.

10AX Plate Switches | Control Switches
10AX Architrave Switches Dimmer Switches
45A Switches | 50A Pull Switch


Switches

MODE®


G5



811 | 825 | 828



812



813

Wide Rocker Switches - Non Modular

CMA811 10AX 1 Gang 2 Way Wide Rocker Switch

CMA812 10AX 2 Gang 2 Way Wide Rocker Switch

CMA813 10AX 3 Gang 2 Way Wide Rocker Switch

CMA825 10AX 1 Gang Wide Rocker Intermediate Switch


CMA828 10AX 1 Gang 2 Way Wide Rocker Retractive Switch



010 | 011



012




105



013



9014



019

MINIGRID®

For the complete range of Minigrid® modules, see the dedicated Minigrid® section, page K18.

Plates Switches - MiniGrid®

CMA010 10AX 1 Gang 1 Way Plate Switch

CMA011 10AX 1 Gang 2 Way Plate Switch

CMA012 10AX 2 Gang 2 Way Plate Switch

CMA013 10AX 3 Gang 2 Way Plate Switch

CMA019 10AX 4 Gang 2 Way Plate Switch

CMA105 10AX 6 Gang 2 Way Plate Switch

Plates Switches - Non Modular

CMA9014 10AX 4 Gang 2 Way Single Plate Switch

Standards: BS EN 60669-1
Back Box Depth (mm): 16
Cable Size (mm²): 4 x 1.5 or 2 x 2.5 Non Modular: 2 x 1.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

click®

sales@scolmore.com | Call: 01827 63454 | scolmore.com

G10



140, 145

146

147

148

MINIGRID®

Interchangeable modules available on page K37.

Dimmer Switches (Leading Edge)

- CMA140** 1 Gang 2 Way 400Va Dimmer Switch
CMA145 1 Gang 2 Way 250Va Dimmer Switch
CMA146 2 Gang 2 Way 250Va Dimmer Switch
CMA147 3 Gang 2 Way 250Va Dimmer Switch
CMA148 4 Gang 2 Way 250Va Dimmer Switch

We recommend the use of branded halogen lamps with all Mode® leading edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® Technical support team.

G11



161

162

163

164

MINIGRID®

Interchangeable modules available on page K37.

Dimmer Switches (Trailing Edge)

- CMA161** 1 Gang 2 Way 100W Dimmer Switch
CMA162 2 Gang 2 Way 100W Dimmer Switch
CMA163 3 Gang 2 Way 100W Dimmer Switch
CMA164 4 Gang 2 Way 100W Dimmer Switch

We recommend the use of branded LED lamps with all Mode® trailing edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. For further information please contact Click® Technical support team.

Standards: BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 BS EN 61000-3-3

Back Box Depth (mm): 25 Cable Size (mm²): 2 x 1.5

Type: Leading Edge

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Standards: BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2

Back Box Depth (mm): 25 Cable Size (mm²): 2 x 1.5

Type: Trailing Edge


Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.

G14



030 | 032



035 | 1035 | 630 | 1635 | 635



1835

Unswitched Socket Outlets

CMA030 13A 1 Gang Unswitched Socket
CMA032 13A 2 Gang Unswitched Socket (Twin Earth)

Switched Standard & 3 Pin Safety Shutter Socket Outlets

Standard	Safety Shutter	
CMA035	CMA1035	13A 1 Gang DP Switched Socket
CMA630	CMA1635	13A 1 Gang Socket (Twin Earth)
CMA635		13A 1 Gang DP Switched Socket (Twin Earth)
CMA1835		13A 1 Gang DP Switched Socket With Neon



036 | 1036



037 | 1037



836 | 1836



840 | 1836

Switched Standard & 3 Pin Safety Shutter Socket Outlets

Standard	Safety Shutter	
CMA036	CMA1036	13A 2 Gang DP Switched Socket (Twin Earth)
CMA037	CMA1037	13A 2 Gang DP Switched Clean Earth Socket

Switched Standard & 3 Pin Safety Shutter Socket Outlets

Standard	Safety Shutter	
CMA836	CMA1836	13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
CMA840	CMA1840	13A 2 Gang DP Switched Socket With Outboard Rockers & Neons (Twin Earth)

Standards: BS 1363-2
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

G15

Specialised Sockets

Introducing our new range of specialised sockets including Blue Medical Socket Outlets, Red & Green Outboard Rocker Sockets.



836



836

Switched Socket Outlets (Coloured Rockers)

CMA836PWRD 13A 2 Gang DP Switched Socket With Outboard Red Rockers (Twin Earth)
CMA836PWGR 13A 2 Gang DP Switched Socket With Outboard Green Rockers (Twin Earth)



630



635



632



637

Blue Medical Socket Outlets (Medical Equipment Only)

CMA630BL	13A 1 Gang Socket (Twin Earth)	CMA632BL	13A 2 Gang Unswitched Socket (Twin Earth)
CMA635BL	13A 1 Gang DP Switched Socket (Twin Earth)	CMA637BL	13A 2 Gang DP Switched Clean Earth Socket

Standards: BS 1363-2
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

**Lockable Socket**

CMA675 13A 1G DP Key Lockable Socket With Neon (Twin Earth)

Two keys provided (Spare keys available: SP660).

675



034

038

039

Round Pin Socket Outlets

CMA034 15A Switched Round Pin Socket

CMA038 5A Round Pin Socket

CMA039 2A Round Pin Socket



935

Non-standard socket

936

Non-standard socket

PA380WH

Non-standard plug

Non-Standard Socket Outlets

CMA935 13A 1 Gang DP Switched Non-Standard Socket

CMA936 13A 2 Gang DP Switched Non-Standard Socket (Twin Earth)

Non-Standard Resilient Plug Tops (BS1363/A)

PA380WH 13A Fused Non-Standard Plug - White

PA380RD 13A Fused Non-Standard Plug - Red

For use with non-standard Click® Mode sockets CMA935 and CMA936

Standards: Round Pin: BS 546 Non Standard: BS 1363-2 675: BS EN 60669-1 BS 1363-2 380: BS 1363/A BS 1362
Back Box Depth (mm): 25 675: 35
Cable Size (mm²): 034: 3 x 2.5 038: 4 x 1.5 or 3 x 2.5 039: 3 x 1.5 675 935 936: 3 x 2.5 or 2 x 4 380: 1.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D) 380: 49.5 (W) x 21 (D) x 49.5 (H)

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.




735

736

Locating Plug Sockets

CMA735 13A 1 Gang DP Switched Locating Plug Socket

CMA736 13A 2 Gang DP Switched Locating Plug Socket With Outboard Rockers (Twin Earth)

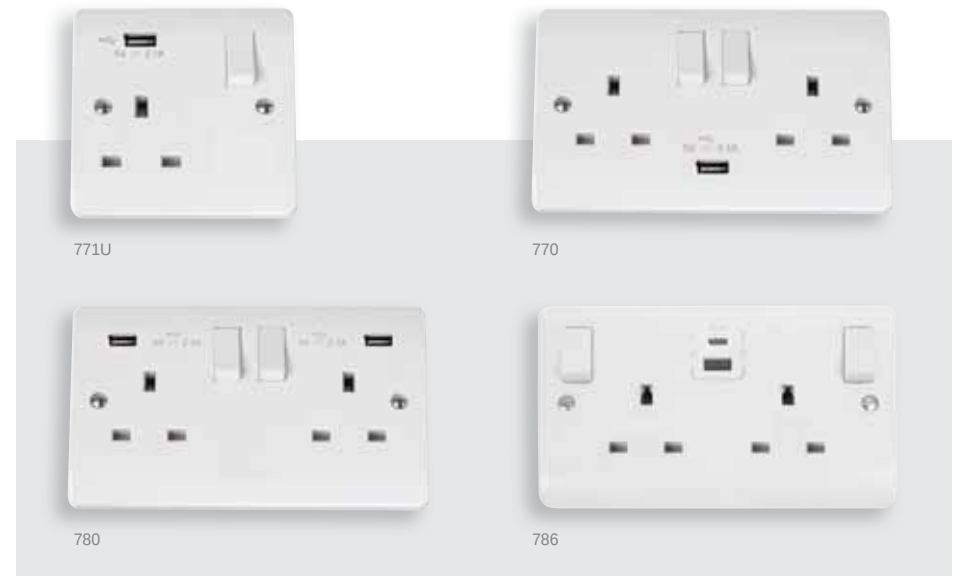

771U

770

780

786

Switched Sockets With USB Outlets

CMA771U 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)


CMA770 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

CMA780 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

CMA786 13A 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2 770, 780, 771U 786: BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 25
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

G20

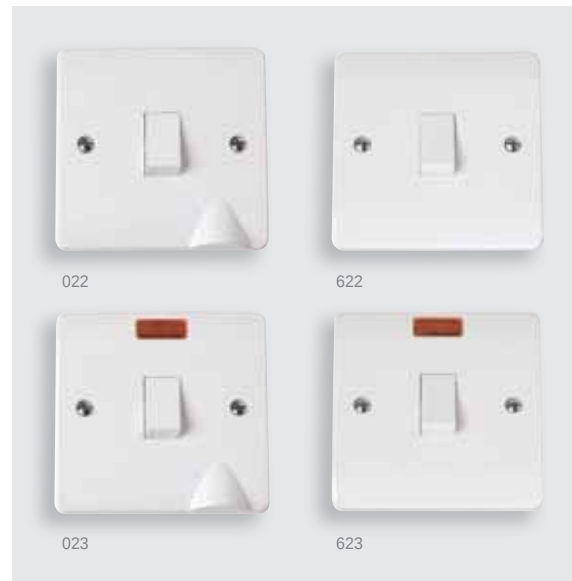**Lockable Switch**

CMA660 20A Double Pole Key Lockable Switch


Two keys provided (Spare keys available: SP660).

20A Control Switches With Optional Flex Outlet Through The Bottom

- CMA022** 20A DP Switch
- CMA023** 20A DP Switch With Neon
- CMA044** 20A DP 'Water Heater' Switch With Flex Outlet
- CMA046** 20A DP 'Water Heater' Switch With Flex Outlet & Neon


20A Control Switch Without Flex Outlet

- CMA622** 20A DP Switch
- CMA623** 20A DP Switch With Neon
- CMA040** 20A DP 'Water Heater' Switch
- CMA042** 20A DP 'Water Heater' Switch With Neon

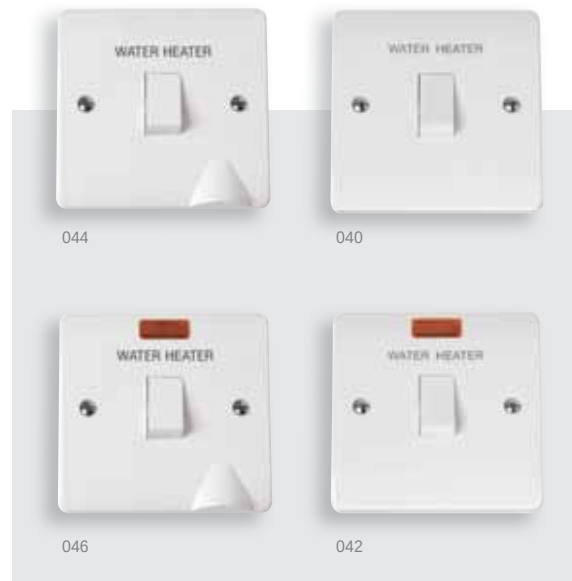

Standards: BS EN 60669-1
Back Box Depth (mm): 25 660: 35
Cable Size (mm²): 3 x 2.5 660: 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)

G21

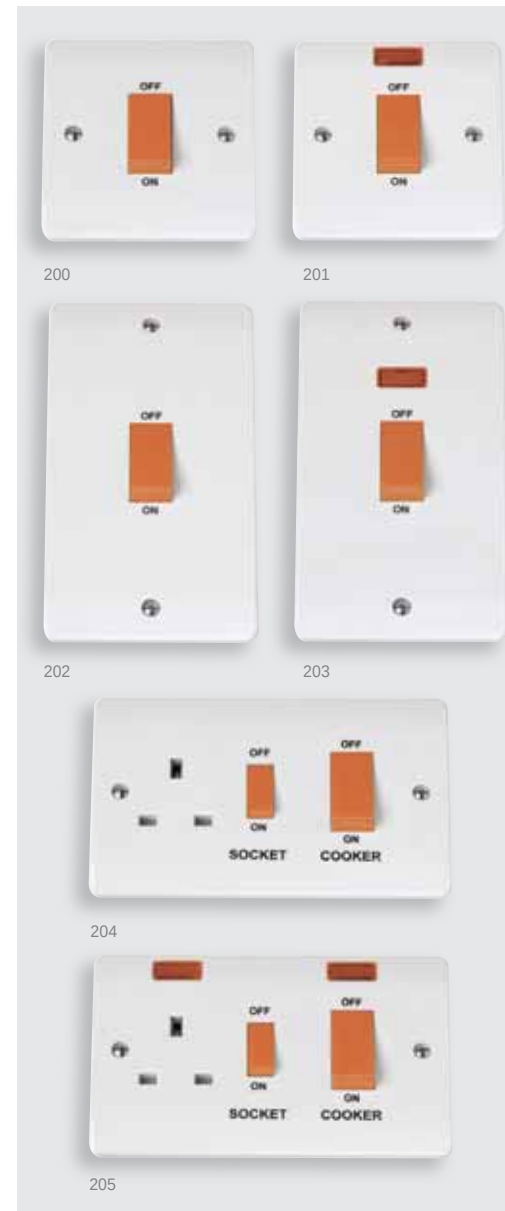**45A Switches**

- CMA200** 45A 1 Gang DP Switch
- CMA201** 45A 1 Gang DP Switch With Neon
- CMA202** 45A 2 Gang DP Switch
- CMA203** 45A 2 Gang DP Switch With Neon

Cooker Control Units

- CMA204** 45A 2 Gang DP Switch With 13A DP Switched Socket
- CMA205** 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 204 205: BS 4177
Back Box Depth (mm): 35
Cable Size (mm²): 1 x 16
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)


All products in the Virro range are available in White, Black and Silver.



801 825



802



803



827

WIDE ROCKER SWITCHES - ONE WAY

- DOB801** 10AX Single Pole 1 Gang 1 Way Plate Switch
DOB802 10AX Single Pole 2 Gang 1 Way Plate Switch
DOB803 10AX Single Pole 3 Gang 1 Way Plate Switch
DOB827 10AX Single Pole 1 Gang Push Bell Plate Switch

WIDE ROCKER SWITCHES - INTERMEDIATE

- DOB825** 10AX Single Pole 1 Gang Intermediate Plate Switch

Understanding the code:

DOB - Plate Style 801- Product Number BK - Plate Finish

Finish options:

BK Black SV Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-1

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D)


Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
 Insert & Front Plates Supplied Together


All products in the Virro range are available in White, Black and Silver.



811 824-1




812 824-2



813 824-3



814



2027BT

WIDE ROCKER SWITCHES - TWO WAY

- DOB811** 10AX Single Pole 1 Gang 2 Way Plate Switch
DOB812 10AX Single Pole 2 Gang 2 Way Plate Switch
DOB813 10AX Single Pole 3 Gang 2 Way Plate Switch
DOB814 10AX Single Pole 4 Gang 2 Way Plate Switch
DOB824-1 20AX Single Pole 1 Gang 2 Way Plate Switch
DOB824-2 20AX Single Pole 2 Gang 2 Way Plate Switch
DOB824-3 20AX Single Pole 3 Gang 2 Way Plate Switch

ILLUMINATED TRIM ROCKER SWITCHES - TWO WAY

- DOB2027BT** 20AX Single Pole 1 Gang Push Bell Plate Locator Switch

Locator Switch With Illuminated Blue LED Trim

Understanding the code:

DOB - Plate Style 801- Product Number BK - Plate Finish

Finish options:

BK Black SV Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-1

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
 Insert & Front Plates Supplied Together

All products in the Virro range are available in White, Black and Silver.



811N



812N



813N



814N

WIDE ROCKER SWITCHES - TWO WAY

- DOB811N** 10AX Single Pole 1 Gang 2 Way Plate Switch With Decorative Insert
- DOB812N** 10AX Single Pole 2 Gang 2 Way Plate Switch With Decorative Insert
- DOB813N** 10AX Single Pole 3 Gang 2 Way Plate Switch With Decorative Insert
- DOB814N** 10AX Single Pole 4 Gang 2 Way Plate Switch With Decorative Insert

Understanding the code:

DOB - Plate Style 801- Product Number BK - Plate Finish

Finish options:

BK Black SV Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-1

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

All products in the Virro range are available in White, Black and Silver.



140/145



146



140PL



146PL

Eliminate Dimmer Flickering

Our new dimmer is much easier to program than regular dimmers because of the two small switches on the back of the module. This allows the dimmer to be programmed without removing from the plate.



MD9014

- 1 Switch 1 allows the minimum brightness to be adjusted
- 2 Switch 2 allows the dimming mode to be adjusted

DIMMER SWITCHES

- DOB140** 1 Gang 2 Way 400W Dimmer Switch
- DOB145** 1 Gang 2 Way 250W Dimmer Switch
- DOB146** 2 Gang 2 Way 250W Dimmer Switch

LED DIMMER MODULES

- MD9014** 100W Dual Mode Dimmer Module with Trim

ROTARY DIMMER SWITCH UNFURNISHED PLATES

- DOB140PL** 1 Gang Dimmer Switch Plate & Control Button
- DOB146PL** 2 Gang Dimmer Switch Plate & Control Buttons

Understanding the code:

DOB - Plate Style 801- Product Number BK - Plate Finish

Finish options:

BK Black SV Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-2-1 BS 5733 BS EN 55015 140 & 146 BS 5733

MD9014: BS EN 60669-1BS EN 60669-2-1BS EN 55015 BS EN 61000-3-2

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D) MD9014: 25mm (W) x 57.5mm (H) x 24.2mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

All products in the Virro range are available in White, Black and Silver.



035 TE035



036 TE036



100

Our dual voltage shaver outlet incorporates a double wound isolating transformer rated 20Va or 115V and meets BS EN 61558-2-5: 2010 making it safe for use in bathrooms. The Shaver outlet is not continuously rated and therefore is not suitable for use as a permanent charging outlet.



035N



036N

UK SWITCHED SOCKET OUTLETS

DOB035	13A 1 Gang Double Pole Switched UK Socket	DOBTE035	13A 1 Gang Double Pole Switched UK Socket With Twin Earth Terminals
DOB036	13A 2 Gang Double Pole Switched UK Socket	DOBTE036	13A 2 Gang Double Pole Switched UK Socket With Twin Earth Terminals
DOB035N	13A 1 Gang Double Pole Switched UK Socket With Neon	DOB036N	13A 2 Gang Double Pole Switched UK Socket With Neon

DUAL VOLTAGE SHAVER SOCKET OUTLETS

DOB100	20VA Dual Voltage Shaver Outlet (115-230V)
---------------	--

Understanding the code:
DOB - Plate Style 801- Product Number BK - Plate Finish

Finish options:
BK Black SV Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS 1363-2 100: BS EN 61558-1 BS EN 61558-2-5

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 6.5mm (D) 2 Gang: 146mm (W) x 86mm (H) x 6.5mm (D)

100: 86mm (W) x 146mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

(All excluding 100)

All products in the Virro range are available in White, Black and Silver.



771



9871



9871N



770



9886N

UK SWITCHED SOCKET OUTLETS WITH USB

DOB771	13A 1 Gang Switched UK Socket With 2.1A USB Outlet
DOB770	13A 2 Gang Switched UK Socket With 2.1A USB Outlet
DOB9871	13A 1 Gang Switched Universal Socket Outlet With 2.1A USB Outlet
DOB9871N	13A 1 Gang Switched Universal Socket Outlet With 2.1A USB Outlet & Neon
DOB9886	13A 2 Gang Switched Universal Socket Outlet With Type A & C USB Outlets
DOB9886N	13A 2 Gang Switched Universal Socket Outlet With Type A & C USB Outlets & Neons

Understanding the code:
DOB - Plate Style 801- Product Number BK - Plate Finish

Finish options:
BK Black SV Silver (if you require an alternative finish to white then please add the required suffix to the product code)


Standards: 770 & 771: BS 1363-2: 2016 + A1: 2018 9871, 9871N, 9886 & 9886N: BS 5733 (USB) IEC 62368-1 (USB)

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 6.5mm (D) 2 Gang: 146mm (W) x 86mm (H) x 6.5mm (D)

1Gang USB: 86mm (W) x 86mm (H) x 6.5mm (D) 2 Gang USB: 146mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

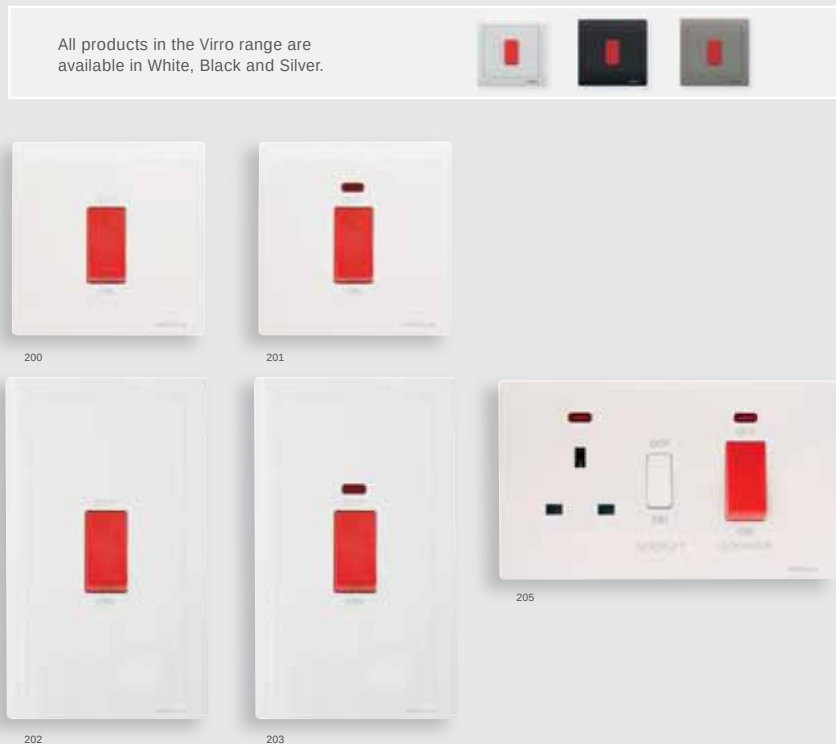

45A SWITCHES

- DOB200** 45A Double Pole 1 Gang Plate Switch
DOB201 45A Double Pole 1 Gang Plate Switch With Neon
DOB202 45A Double Pole 2 Gang (Vertical) Plate Switch
DOB203 45A Double Pole 2 Gang (Vertical) Plate Switch With Neon

45A COOKER CONTROL UNIT

- DOB205** 45A Double Pole Switch & 13A Double Pole Switched Socket & Neons

Understanding the code:

DOB - Plate Style 801- Product Number BK - Plate Finish

Finish options:

BK Black SV Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-1 205: BS 5733

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 6.5mm (D) 2 Gang: 86mm (W) x 146mm (H) x 6.5mm (D)
 205: 146mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
 Insert & Front Plates Supplied Together



20A CONTROL SWITCHES

- DOB822NACCP** 20A Double Pole 1 Gang Cover Plate Switch With Neon - Air Conditioning
DOB822NWHCP 20A Double Pole 1 Gang Cover Plate Switch With Neon - Water Heater

32A CONTROL SWITCHES

- DOB232NACCP** 32A Double Pole 1 Gang Cover Plate Switch With Neon - Air Conditioning

FLEX OUTLET PLATE

- DOB017** 20A 3 Termination Plate With Optional Flex Outlet

45A COOKER CONNECTION PLATE

- DOB215** 45A 3 Termination Plate With Optional Cable Outlet

Understanding the code:

DOB - Plate Style 801- Product Number BK - Plate Finish

Finish options:

BK Black SV Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS 5733

Dimensions: 017: 86mm (W) x 86mm (H) x 6.5mm (D) 215: 86mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
 Insert & Front Plates Supplied Together

All products in the Seera[®] range are available in White, Black and Silver.



801 825



802



803



827

10AX PLATE SWITCHES

- CPC801** 10AX Single Pole 1 Gang 1 Way Plate Switch
CPC802 10AX Single Pole 2 Gang 1 Way Plate Switch
CPC803 10AX Single Pole 3 Gang 1 Way Plate Switch
CPC827 10AX Single Pole 1 Gang Push Bell Plate Switch

10AX PLATE SWITCHES

- CPC825** 10AX Single Pole 1 Gang Intermediate Plate Switch

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-1

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
 Insert & Front Plates Supplied Together

All products in the Seera[®] range are available in White, Black and Silver.




811



812



813



814

10AX PLATE SWITCHES

- CPC811** 10AX Single Pole 1 Gang 2 Way Plate Switch
CPC812 10AX Single Pole 2 Gang 2 Way Plate Switch
CPC813 10AX Single Pole 3 Gang 2 Way Plate Switch
CPC814 10AX Single Pole 4 Gang 2 Way Plate Switch

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-1

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
 Insert & Front Plates Supplied Together

All products in the Seera[®] range are available in White, Black and Silver.



140/145



146

Eliminate Dimmer Flickering

Our new dimmer is much easier to program than regular dimmers because of the two small switches on the back of the module. This allows the dimmer to be programmed without removing from the plate.



MD9014

- 1 Switch 1 allows the minimum brightness to be adjusted
- 2 Switch 2 allows the dimming mode to be adjusted

ROTARY DIMMER SWITCHES

CPC140 1 Gang 2 Way 400W Dimmer Switch

CPC145 1 Gang 2 Way 250W Dimmer Switch

CPC146 2 Gang 2 Way 250W Dimmer Switch

LED DIMMER MODULES

MD9014 100W Dual Mode Dimmer Module with Trim

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-2-1 BS 5733 BS EN 55015

MD9014: BS EN 60669-1BS EN 60669-2-1BS EN 55015 BS EN 61000-3-2

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D) **MD9014:** 25mm (W) x 57.5mm (H) x 24.2mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

All products in the Seera[®] range are available in White, Black and Silver.



140PL



146PL

Eliminate Dimmer Flickering

Our new dimmer is much easier to program than regular dimmers because of the two small switches on the back of the module. This allows the dimmer to be programmed without removing from the plate.



MD9014

- 1 Switch 1 allows the minimum brightness to be adjusted
- 2 Switch 2 allows the dimming mode to be adjusted

ROTARY DIMMER SWITCH UNFURNISHED PLATES

CPC140PL 1 Gang Dimmer Switch Plate & Control Button

CPC146PL 2 Gang Dimmer Switch Plate & Control Buttons

LED DIMMER MODULES

MD9014 100W Dual Mode Dimmer Module with Trim

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS 5733: 2010 + A1: 2014

MD9014: BS EN 60669-1BS EN 60669-2-1BS EN 55015 BS EN 61000-3-2

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D) **MD9014:** 25mm (W) x 57.5mm (H) x 24.2mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

All products in the Seera® range are available in White, Black and Silver.



035



036



100

Our dual voltage shaver outlet incorporates a double wound isolating transformer rated 20Va or 115V and meets BS EN 61558-2-5: 2010 making it safe for use in bathrooms. The Shaver outlet is not continuously rated and therefore is not suitable for use as a permanent charging outlet.



035N



036N

UK 13A SOCKET OUTLETS

CPC035	13A 1 Gang Double Pole Switched UK Socket	CPC036N	13A 2 Gang Double Pole Switched UK Socket With Neon
CPC036	13A 2 Gang Double Pole Switched UK Socket		
CPC035N	13A 1 Gang Double Pole Switched UK Socket With Neon		

DUAL VOLTAGE SHAVER OUTLET

CPC100	20VA Dual Voltage Shaver Outlet (115-230V)
---------------	--

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS 1363-2 **100:** BS EN 61558-1 BS EN 61558-2-5:2010

Dimensions: **1 Gang:** 86mm (W) x 86mm (H) x 6.5mm (D) **2 Gang:** 146mm (W) x 86mm (H) x 6.5mm (D)

100: 86mm (W) x 146mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

(All excluding 100)



All products in the Seera® range are available in White, Black and Silver.



771




034



060



770



061

UK SOCKET OUTLETS WITH CHARGING USB

CPC771	13A 1 Gang Switched UK Socket With USB Outlet
CPC770	13A 2 Gang Switched UK Socket With USB Outlet

ROUND PIN SOCKET OUTLETS

CPC034	15A Round Pin 1 Gang Switched Socket
---------------	--------------------------------------

BLANK PLATES

CPC060	1 Gang Blank Plate
CPC061	2 Gang Blank Plate

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: **770 & 771:** BS 1363-2: 2016 + A1: 2018 **060 & 061:** BS 5733

Dimensions: **1 Gang:** 86mm (W) x 86mm (H) x 6.5mm (D) **2 Gang:** 146mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

**034, 770
& 771:**



All products in the Seera® range are available in White, Black and Silver.



9871




9871N



9835N



9836N



9886N

UNIVERSAL UNIVERSAL SOCKETS

- CPC9871** 13A 1 Gang Switched Universal Socket Outlet With Single 2.1A USB Outlet
- CPC9871N** 13A 1 Gang Switched Universal Socket Outlet With 2.1A USB Outlet & Neon
- CPC9886** 13A 2 Gang Switched Universal Socket Outlet With Type A & C USB (4.2A) Outlets
- CPC9886N** 13A 2 Gang Switched Universal Socket Outlet With Type A & C USB Outlets & Neons
- CPC9835N** 1 Gang 13A Universal Switched Socket With Neon
- CPC9836N** 2 Gang 13A Universal Switched Socket With Neon

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: 9871, 9871N, 9886 & 9886N: IEC 62368-1: 2018 EN 62680-1-1: 2015

Dimensions: 1Gang: 86mm (W) x 86mm (H) x 6.5mm (D) 2 Gang: 146mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

All products in the Seera® range are available in White, Black and Silver.



822



822N



232N



232NAC

20A CONTROL SWITCHES

- CPC822** 20A Double Pole 1 Gang Plate Switch
- CPC822N** 20A Double Pole 1 Gang Plate Switch With Neon

32A DOUBLE POLE SWITCHES

- CPC232N** 32A Double Pole 1 Gang Plate Switch With Neon
- CPC232NAC** 32A Double Pole 1 Gang Plate Switch With Neon - Air Conditioning

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-1

Dimensions: 86mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

All products in the Seera® range are available in White, Black and Silver.



200



201



203



205

45A DOUBLE POLE SWITCHES

- CPC200** 45A Double Pole 1 Gang Plate Switch
- CPC201** 45A Double Pole 1 Gang Plate Switch With Neon
- CPC203** 45A Double Pole 2 Gang (Vertical) Plate Switch With Neon

45A COOKER CONTROL UNIT

- CPC205** 45A Double Pole Switch & 13A Double Pole Switched Socket & Neons

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS EN 60669-1 **205:** BS 4177

Dimensions: **1 Gang:** 86mm (W) x 86mm (H) x 6.5mm (D) **2 Gang:** 86mm (W) x 146mm (H) x 6.5mm (D)
205: 86mm (W) x 146mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together

All products in the Seera® range are available in White, Black and Silver.



017



215

CONNECTION PLATE

- CPC017** 20A 3 Termination Plate With Optional Flex Outlet

CONNECTION PLATE

- CPC215** 45A 3 Termination Plate With Optional Cable Outlet

Understanding the code:

CPC - Plate Style **801** - Product Number **BK** - Plate Finish

Finish options:

BK Black **SV** Silver (if you require an alternative finish to white then please add the required suffix to the product code)

Standards: BS 5733

Dimensions: **017:** 86mm (W) x 86mm (H) x 6.5mm (D) **215:** 86mm (W) x 86mm (H) x 6.5mm (D)

Additional Information:

A stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories
Insert & Front Plates Supplied Together